© [redacted] AND PARKER, P.C. 2014

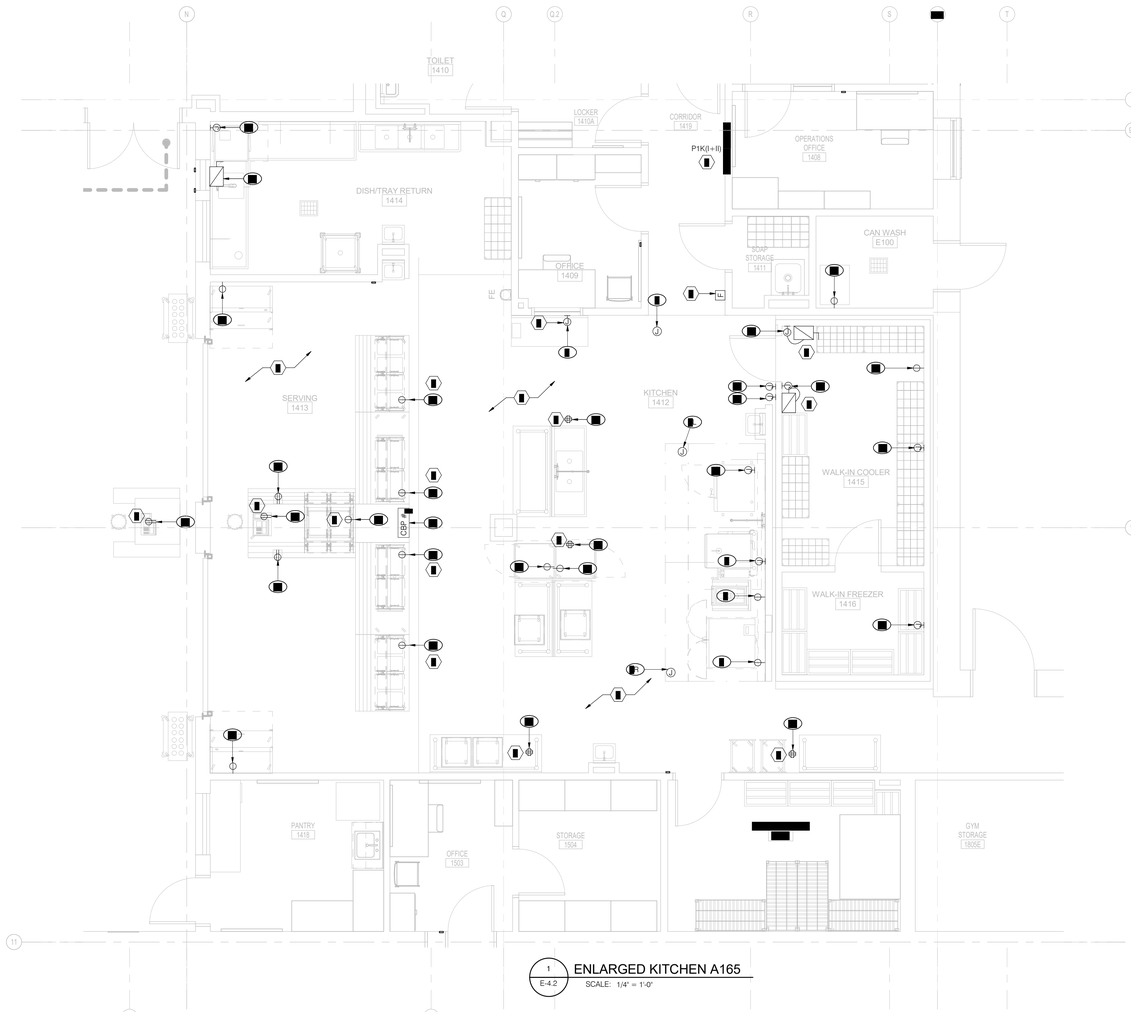

1 / E-4.2 ENLARGED KITCHEN A165

SCALE: 1/4" = 1'-0"

KITCHEN EQUIPMENT ELECTRICAL NOTES

1. ALL [redacted]S AND CONNECTIONS SHOWN RELATE TO FOOD SERVICE FIXTURES AND EQUIPMENT ONLY. SEE ARCHITECTURAL/ENGINEERING PLANS FOR ADDITIONAL ELECTRICAL REQUIREMENTS.
2. THIS ELECTRICAL PLAN IS [redacted] TYPES, AND CONNECTION POSITIONS AND LOAD REQUIREMENTS. VERIFY FINISH WALL PARTITION LOCATIONS WITH ARCHITECTURAL DRAWINGS.
3. ALL ELECTRICAL WORK FOR FABRICATED FOOD SERVICE EQUIPMENT SHALL BE COMPLE[redacted]; WIRED BY [redacted] TO A COMMON JUNCTION BOX, PULL BOX, OR CONTROL PANEL ON THE EQUIPMENT IN AN ACCESSIBLE POSITION. FINAL CONNECTIONS TO EQUIPMENT JUNCTION BOX OR PULL BOX, AND ALL ELECTRICAL WORK FROM [redacted] BY THE ELECTRICAL [redacted].
4. FINAL CONNECTIONS TO ALL FOOD SERVICE EQUIPMENT SHALL BE PERFORMED BY THE ELECTRICAL [redacted], INCLUDING MATERIALS.
5. PIPING, [redacted] AND SIMILAR CONSTRUCTION, LOCATED OUTSIDE A WALL, MUST BE INSTALLED SO THAT THERE IS A MINIMUM OF 3/4 INCH SPACE BETWEEN IT AND THE WALL.
6. ELECTRICAL [redacted] (E.C.), OR EQUIVALENT, SHALL FURNISH AND INSTALL THE FOLLOWING:

- ALL [redacted] ELECTRICAL [redacted]S, [redacted] PLATES, [redacted], [redacted], NOT BUILT INTO FIXTURES OR EQUIPMENT. ALL [redacted]S, [redacted], [redacted] PLATES, [redacted] IN DISHROOMS AND SIMILAR WET LOCATIONS OR AS INDICATED ON SCHEDULE SHALL BE MOISTURE AND WATER PROOF.
- ALL PLUGS AND [redacted]S AS NOTED ON SCHEDULE. ALL [redacted]S SHALL BE N.E.M.A. RATED AND U.L. APPROVED FOR MANUFACTURED AND FABRICATED EQUIPMENT.
- SHUNT-TRIP [redacted]UIT BREAKERS OR DISCONNECTS FOR [redacted] REQUIRED BY N.F.P.A.-96, LATEST EDITION, AND [redacted] CODES.
- DISCONNECTS OR OTHER DEVICES AS REQUIRED BY CODES.
- FOR DISCONNECTS WHEN APPLICABLE, ELECTRICAL [redacted] SHALL PROVIDE [redacted] AND WIRING, INSTALL ELECTRICAL COMPONENTS (PROVIDED BY [redacted]), AND INTERWIRE BETWEEN THE FOLLOWING:
- REMOTE REFRIGERATION SYSTEMS TO EVAPORATOR COILS.
- WALK-IN COOLER/FREEZER LIGHTS (RUN [redacted] ABOVE COMPAR[redacted]ENT CEILING).
- [redacted] (WHEN USED).
- CONTROL PANELS TO WATER-TYPE VENTILATORS AND EXHAUST/SUPPLY FANS PER MANUFACTURER'S INSTRUCTIONS.
- KITCHEN EXHAUST HOODS/VENTILATORS TO FIRE CONTROL SYSTEM AND SHUT-OFFS.

GENERAL DRAWING NOTES

1. [redacted] TO DRAWING E-0.1G/E-0.1H FOR ELECTRICAL GENERAL NOTES, GENERAL DEMOLITION NOTES, [redacted] AND ABBREVIATIONS. [redacted] TO DRAWING E-5.1G/E-5.1H FOR POWER RISER DIAGRAM, E-6.2G/H THRU E-6.5G/H FOR PANEL SCHEDULES.
2. [redacted] TO MECHANICAL/PLUMBING DRAWINGS FOR EXACT MECHANICAL/PLUMBING EQUIPMENT LOCATIONS.
3. ALL EQUIPMENT INSTALLED UNDER THE KITCHEN EQUIPMENT HOOD MUST BE PROVIDED WITH SHUNT TRIP [redacted]UIT BREAKER AND TIED IN WITH THE HOOD FIRE SUPPRESSION SYSTEM.
4. FIELD COORDINATE THE EXACT LOCATION OF ALL KITCHEN EQUIPMENT WITH THE FOOD SERVICE CONSULTANT'S LAYOUT AND DRAWINGS.
5. PRIOR TO ANY [redacted], COORDINATE AND COMPLY WITH THE KITCHEN EQUIPMENT MANUFACTURER'S REQUIREMENTS AND RECOMMENDATIONS.
6. UNLESS OTHERWISE NOTED IN THE PLAN ALL RECEPTACLES IN KITCHEN SHALL BE OF GFI TYPE.

(#) [redacted] NOTES

1. ANSUL FIRE PROTECTION SYSTEM PULL STATION FOR KITCHEN EXHAUST HOOD. COORDINATE EXACT LOCATION AND REQUIREMENTS WITH KITCHEN EQUIPMENT VENDOR PRIOR TO ROUGH-IN.
2. JUNCTION BOX FOR FIRE SUPPRESSION SYSTEM. COORDINATE EXACT LOCATION WITH KITCHEN EQUIPMENT VENDOR PRIOR TO [redacted].
3. PROVIDE STAINLESS STEEL PLATE [redacted].
4. PROVIDE 30A-2P+S/N-240V DISCONNECT SWITCH FOR CONDENSING UNIT. COORDINATE WITH MECHANICAL DRAWINGS FOR EXACT EQUIPMENT LOCATIONS PRIOR TO [redacted].
5. UNLESS OTHERWISE NOTED IN THE PLAN ALL RECEPTACLES IN KITCHEN SHALL BE OF GFI TYPE.
6. PROVIDE 3/4" EMPTY [redacted] FROM EACH CASH REGISTER [redacted] TO NEAREST WALL AND [redacted] MANAGER OFFICE.
7. [redacted] CBP#1(ITEM #65)
8. QUAD RECEPTACLE FOR CEILING HUNG POWER REELS. COORDINATE WITH ARCHITECT/EQUIPMENT VENDOR FOR EXACT LOCATION AND MOUNTING REQUIREMENTS PRIOR TO [redacted].

KITCHEN ELECTRICAL POWER CONNECTION SCHEDULE

[redacted] NO	QTY.	HP	KW	AMP	VOLT	PHASE	BREAKER AMP	BREAKER POLE	FEEDER AND [redacted]	[redacted]CUIT HOMERUN PANEL DESIGNATION	[redacted]	ITEM NO	φ	φ	⊕			SHUNT TRIP	[redacted]
2L	1	-	-	5	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-1	EXHAUST HOOD	2L				●			PROVIDE JUNCTION BOX AT +104" [redacted]
2R	1	-	-	5	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	[redacted]	EXHAUST HOOD	2R				●			PROVIDE JUNCTION BOX AT +104" [redacted]
[redacted]	[redacted]	-	-	8	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-31	EXHAUST HOOD CONTROL PANEL	4				●		●	PROVIDE JUNCTION BOX AT +104" [redacted]
[redacted]	[redacted]	-	-	-	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-50	FIRE SUPPRESSION SYSTEM	3				●			PROVIDE JUNCTION BOX AT +96" [redacted]
[redacted]	[redacted]	[redacted]	[redacted]	4	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-4	DOUBLE DECK CONVECTION OVEN-GAS	5	●					●	PROVIDE NEMA 5-20R AT +11 3/4" [redacted]
6	1	-	7.0	22	208	3	30	3	3 #10 AWG + 1 #10 AWG G IN 3/4" C.	P1K-19,21,23	INDUCTION GREEN HEAT	6	●					●	PROVIDE [redacted] +2' 6" [redacted]
[redacted]	[redacted]	[redacted]	[redacted]	[redacted]	120	[redacted]	[redacted]	[redacted]	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-5	[redacted] SKILLET	[redacted]				●		●	PROVIDE NEMA 5-20R & JUNCTION BOX AT +16" [redacted]
[redacted]	[redacted]	[redacted]	[redacted]009	25	208	[redacted]	[redacted]	[redacted]	2 #8 AWG + 1 #10 AWG G IN 1" C.	P1K-51,53	COMBINATION OVEN	[redacted]				●		●	PROVIDE JUNCTION BOX AT +24" [redacted]
[redacted]	[redacted]	[redacted]	[redacted]1	[redacted]	[redacted]	[redacted]	30	[redacted]	2 #10 AWG + 1 #10 AWG G IN 3/4" C.	P1K-8 P1K-52	MOBILE HOT FOOD CABINET	[redacted]	●						PROVIDE NEMA 5-20R AT 24" [redacted] POWER VIA #15.
[redacted]	[redacted]	[redacted]	-	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]#10 AWG + 1 #10 AWG G IN 3/4" C.	P1K-9, P1K-54, P1K-56 & P1K-58	CEILING HUNG [redacted] REEL	[redacted]			●				PROVIDE NEMA 5-20R RECEPTACLE AT +108" [redacted]
[redacted]	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]#10 AWG + 1 #10 AWG G IN 3/4" C.	7	MOBILE 4-WELL HOT FOOD TABLE W/ FOOD GUARD W/ LIGHTS AND TRAY SLIDE	[redacted]	●						PROVIDE NEMA 14-30R RECEPTACLE AT [redacted] [redacted] POWERED THROUGH ITEM #65.
[redacted]	[redacted]	[redacted]3	[redacted]26	11	[redacted]	1	[redacted]	[redacted]	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-11 P1K-60	MOBILE MILK CHEST	[redacted]	●						PROVIDE RECEPTACLE AT +12" [redacted]
[redacted]	[redacted]	1/4	-	7	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	7	MOBILE COLD [redacted] FOOD GUARD W/ LIGHTS AND TRAY SLIDE	[redacted]	●						PROVIDE NEMA 5-20R RECEPTACLE AT [redacted] [redacted] POWERED THROUGH ITEM #65.
[redacted]	[redacted]	1/4	-	8	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	7	UTILITY COUNTER W/ FROST TOP AND DOUBLE-SIDED DISPLAY AND CASHIER COUNTER WITH TWIN TRAY SLIDE	24	●						PROVIDE NEMA 5-20R RECEPTACLE AT [redacted] [redacted] POWERED THROUGH ITEM #65.
[redacted]	[redacted]	-	-	7	[redacted]	[redacted]	[redacted]	[redacted]	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-14 P1K-17	[redacted]	32		●					PROVIDE RECEPTACLE AT [redacted] [redacted]
[redacted]	[redacted]	[redacted]	-	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-15 P1K-61	CASH [redacted]	33		●					PROVIDE NEMA RECEPTACLE AT +24" [redacted]
[redacted]	[redacted]	-	[redacted]	[redacted]	[redacted]	1	[redacted]	[redacted]	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	ELM-2	WALK-IN COOLER/FREEZER	[redacted]				●			PROVIDE JUNCTION BOX AT +76" [redacted]
[redacted]	[redacted]	-	[redacted]	2	[redacted]	1	[redacted]	[redacted]	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	ELM-1	EVAPORATOR, 34°F	[redacted]				●			PROVIDE JUNCTION BOX AT +86" [redacted]
[redacted]	[redacted]	-	-	8	[redacted]	3	20	3	3 #12 AWG + 1 #12 AWG G IN 3/4" C.	ELM-4,6,8	CONDENSER, 34°F	36				●	●		PROVIDE JUNCTION BOX AT +108" [redacted]
[redacted]	[redacted]	-	[redacted]	7	[redacted]	1	[redacted]	[redacted]	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	ELM-11,13	EVAPORATOR, -10°F	[redacted]				●			PROVIDE JUNCTION BOX AT +86" [redacted]
[redacted]	[redacted]	-	[redacted]	10	208	3	[redacted]	3	3 #12 AWG + 1 #12 AWG G IN 3/4" C.	ELM-5,7,9	CONDENSER, -10°F	[redacted]				●	●		PROVIDE JUNCTION BOX AT +108" [redacted]
[redacted]	[redacted]	-	-	[redacted]	[redacted]	[redacted]	60	[redacted]	[redacted]#4 AWG + 1 #8 AWG G IN 1" C.	P1K-24,26,28	[redacted] W/ BOOSTER [redacted]	52					●		
[redacted]	[redacted]	-	-	5	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]#12 AWG + 1 #12 AWG G IN 3/4" C.	[redacted]	VENTLESS CONDENSATE HOOD	53				●			PROVIDE JUNCTION BOX AT +104" [redacted]
[redacted]	[redacted]	1/5	[redacted]	3	[redacted]	1	[redacted]	[redacted]	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	[redacted]	[redacted] CURTAIN	[redacted]				●			PROVIDE JUNCTION BOX AT +84" [redacted]
[redacted]	[redacted]	-	[redacted]	50	208	3	[redacted]	3	3 #4 AWG + 1 #8 AWG G IN 1" C.	P1K-30,32,34	[redacted] FILLER SECTION	[redacted]							PROVIDE [redacted]CUIT BREAKER PANEL(CBP #1), AT 24" [redacted] SERVES ITEM #21, #23, AND #24.
[redacted]	[redacted]	-	-	2	120	1	20	1	2 #12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-2	[redacted] TREA[redacted]ENT SYSTEM	67	●						PROVIDE RECEPTACLE AT +72" [redacted]
[redacted]	[redacted]	1.5	-	12	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]#12 AWG + 1 #12 AWG G IN 3/4" C.	P1K-63	MOBILE HIGH PRESSURE WASHER	68	●						PROVIDE RECEPTACLE AT +24" [redacted]

NOTES:

1. COORDINATE WITH KITCHEN CONSULTANT AND EQUIPMENT VENDOR TO VERIFY FOR EXACT EQUIPMENT CONNECTION REQUIREMENTS, LOCATIONS, SPECIFICATIONS, DEVICE MOUNTING HEIGHTS AND ASSOCIATED [redacted] ROUTE AND TERMINATION POINTS PRIOR TO [redacted].
2. PROVIDE [redacted] FOR ALL RECEPTACLES INSTALLED IN THE KITCHEN.
3. ALL EQUIPMENT INSTALLED UNDER THE KITCHEN EQUIPMENT HOOD MUST BE PROVIDED WITH SHUNT TRIP [redacted]UIT BREAKER AND TIED IN WITH THE HOOD FIRE SUPPRESSION SYSTEM.

SETTY
ONE SOUTH STREET, SUITE 1130
BALTIMORE, MARYLAND 21202
[redacted]
MAINTENANCE MANAGEMENT
ENERGY MANAGEMENT SERVICES • FACILITY MANAGEMENT
CONSULTING • DESIGN • CONSTRUCTION MANAGEMENT
DISTRICT OF COLUMBIA • MARYLAND
www.SETTY.com
PROJECT NUMBER: SA2017-F-8-F-F

[redacted] Beltsville Drive
Suite 600
Calverton, MD 20705
[redacted] 301.595.[redacted]
www.[redacted]indparker.com

GRIMM AND PARKER

GP# 21553

KITCHEN EQUIPMENT ENLARGED PLANS

LAND

DATE	DESCRIPTION

E-4.2

03/13/2017

[redacted] SET

© [redacted] AND PARKER, P.C. 2014