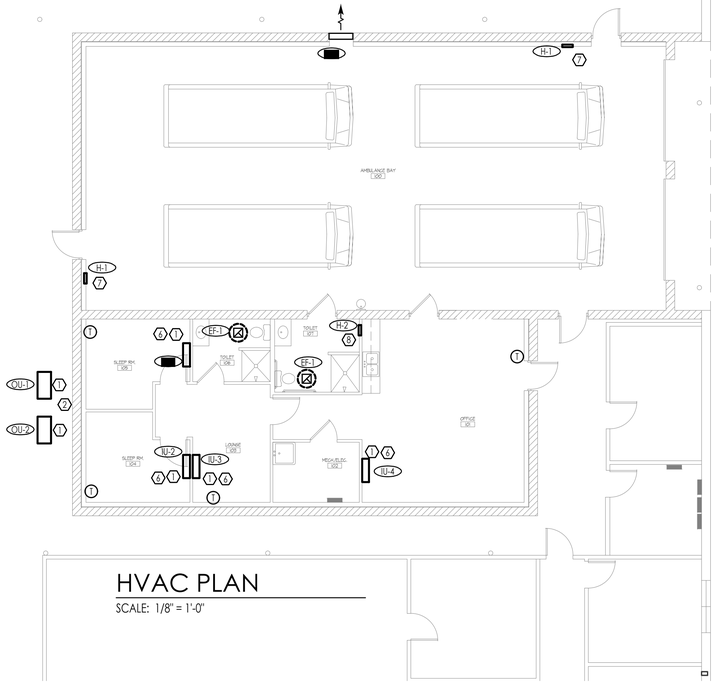

HVAC PLAN

SCALE: 1/8" = 1'-0"

SHEET NOTES

1. [redacted] IU-2, IU-3, & OU-1: [redacted] 2,3, KMIR327 -3F09, OU-1: KMIR 327-H, OU-2, IU-4, KSOQ012 (IU) KSIQ012-HI8-OSEER, 60' LINE SET.

2. KLIMIARE MODEL NUMBERS, SEPARATE THERMOSTAT FOR EACH INDOOR UNIT, [redacted] MOUNT REMOTE THERMOSTATS, WITH TWO 15' AND ONE 25' INSTALLATION KITS. 208V, SINGLE PHASE, 30 AMPS. INDOOR UNITS FEED FROM OUTDOOR UNITS. "SNAP" TYPE DISCONNECT AT EACH INDOOR UNIT, [redacted] FOR EACH OUTDOOR UNIT. 1 YEAR PARTS WARRANTY, 5 YEAR COMPRESSOR WARRANTY.

3. SEPARATE THERMOSTAT FOR EACH INDOOR UNIT, [redacted] MOUNT REMOTE THERMOSTATS, WITH TWO 15' AND ONE 25' INSTALLATION KITS. 208V, SINGLE PHASE, 35 AMPS. INDOOR UNITS FEED FROM OUTDOOR UNITS. "SNAP" TYPE DISCONNECT AT EACH INDOOR UNIT, [redacted] FOR EACH OUTDOOR UNIT. 1 YEAR PARTS WARRANTY, 5 YEAR COMPRESSOR WARRANTY.

4. EF-1: GREENHECK SP-A90-QD, 70 [redacted] AT 1/4" [redacted] 70 [redacted] 50 [redacted] UP TO GREENHECK RCC-7 ROOF CAP (WITH BIRD SCREEN). 12" HIGH ROOF CURB, [redacted] WITH BATHROOM LIGHT SWITCH, BUILT-IN SPEED ADJUSTMENT.

5. [redacted] GREENHECK 1-440, 900 [redacted] AT 0.25" [redacted] DIRECT DRIVE, SPEED CONTROL, 1/6 [redacted] 120V, WITH WALL HOUSING, [redacted] AND INSECT DRIVE, 14" DIAMETER FAN.

6. [redacted] TO MOP BASIN. CONCEAL LINES AS POSSIBLE.

7. H-1, 3 KW DAYTON OR EQUAL RECESSED ELECTRIC HEATER, [redacted] AND DISCONNECT. MODEL 3UG57, 208 VOLTS, SINGLE PHASE.

8. H-2, 1.5 KW DAYTON OR EQUAL RECESSED ELECTRIC HEATER, [redacted] AND DISCONNECT. MODEL2HAD6, 120 VOLTS.

GENERAL HVAC NOTES

1. ALL WORK SHALL BE IN ACCORDANCE WITH THE BEST QUALITY STANDARDS OF THE TRADE, AND SHALL CONFORM WITH ALL FEDERAL, STATE, AND LOCAL CODES AND STANDARDS.
2. CONTRACT DOCUMENTS CONSIST OF BOTH THE PROJECT MANUAL AND DRAWINGS, AND [redacted] INTENDED TO BE COMPLEMENTARY. ANYTHING APPEARING ON EITHER MUST BE EXECUTED THE SAME AS IF SHOWN ON BOTH.
3. [redacted] ALL COSTS REQUIRED TO [redacted] Y AND PROPERLY INSTALL ALL WORK REQUIRED FOR THE PROJECT, AND SHALL EXAMINE THE SCOPE OF WORK OF OTHER TRADES PRIOR TO SUBMITTING A BID PROPOSAL.
4. CONSTRUCTION DOCUMENTS SHALL BE FOLLOWED AS CLOSELY AS POSSIBLE, HOWEVER, SYSTEMS HAVE BEEN SHOWN DIAGRAMMATICALLY AND IN SOME CASES, ENLARGED FOR CLARITY. ANY OFFSETS, ADDITIONAL FITTINGS, AND/OR APPURTENANCES REQUIRED TO PROVIDE A [redacted] AND COORDINATED SYSTEM SHALL BE BORNE BY THE CONTRACTOR.
5. [redacted] WITH THE ARCHITECTURAL DRAWINGS IN DEFINING THE WORK OF THE CONTRACT DOCUMENTS. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO CHECK WITH THE ARCHITECTURAL DRAWINGS BEFORE THE INSTALLATION OF ENGINEERING WORK. SHOULD THERE BE A [redacted] BETWEEN THE ARCHITECTURAL DRAWINGS AND THE ENGINEERING DRAWINGS THAT WOULD CAUSE AN AWKWARD OR [redacted] INSTALLATION, [redacted] FOR CLARIFICATION PRIOR TO INSTALLATION OF SAID WORK. ANY WORK INSTALLED IN CONFLICT WITH THE ARCHITECTURAL/ENGINEER DRAWINGS SHALL BE CORRECTED BY THE CONTRACTOR AT THEIR EXPENSE AND AT NO ADDITIONAL COST TO THE OWNER OR ARCHITECT/ENGINEER.
6. [redacted] THE DRAWINGS ARE NOT NECESSARILY TO SCALE. THE CONTRACTOR SHALL VERIFY ALL [redacted] AND [redacted] AT THE JOB SITE PRIOR TO THE START OF CONSTRUCTION. IF DISCREPANCIES ARE FOUND, THE ARCHITECT/ENGINEER SHALL BE NOTIFIED FOR CLARIFICATION BEFORE COMMENCING THE WORK. EXPLICIT [redacted] SHALL HAVE PRECEDENCE OVER SCALE.
7. CONTRACTOR SHALL FELD VERIFY ALL EXISTING [redacted] PRIOR TO BIDDING OR BEGINNING WORK ON THIS PROJECT.
8. DETAILS NOT SHOWN ARE SIMILAR IN CHARACTER TO THOSE SHOWN. WHERE SPECIFIC [redacted] DETAILS OR DESIGN INTENT CANNOT BE DETERMINED, CONSULT THE ARCHITECT/ENGINEER BEFORE PROCEEDING WITH THE WORK.
9. ANY DETAILS, SYSTEMS AND/OR MATERIALS WHICH ARE PROPOSED TO BE CHANGED MUST FIRST BE REVIEWED BY THE OWNER AND ARCHITECT/ENGINEER PRIOR TO THE PREPARATION OF SHOP DRAWINGS.
10. [redacted] TO MANUFACTURER'S INSTALLATION INSTRUCTIONS AND TEMPLATE DRAWINGS FOR ALL MECHANICAL EQUIPMENT SUPPORTS. [redacted] SPRING ISOLATION. [redacted] . NOT SHOWN ON THE DRAWINGS
11. [redacted] TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT LOCATION OF CEILING MOUNTED MATERIALS INCLUDING ALL DIFFUSERS, GRILLES, AND REGISTERS.
12. ALL DUCTWORK [redacted] ARE CLEAR INSIDE [redacted] AND DO NOT INCLUDE INSULATION OR INTERNAL LINING.
13. ALL BRANCH SUPPLY DUCTS SHALL HAVE VOLUME DAMPERS AT CONNECTION TO THE [redacted] OR OPPOSED BLADE DAMPER INCLUDED WITH THE SUPPLY GRILLE.
14. FLEXIBLE DUCTWORK USED IN BRANCH RUNS SHALL BE LIMITED TO A MAXIMUM OF 6 FEET. BRANCH DUCTWORK TO DIFFUSER SHALL BE SAME SIZE AS DIFFUSER INLET UNLESS SPECIFICALLY LABELED OTHERWISE. [redacted] TO DIFFUSER SCHEDULE FOR INLET SIZES. AVOID SHARP BENDS IN FLEXIBLE DUCTWORK WHICH MAY CAUSE EXCESSIVE NOISE.
15. PROVIDE CONCRETE PAD FOR CONDENSING UNITS.
16. INSTALL AIR HANDLER ON CONCRETE HOUSE KEEPING PAD.
17. ROUTE ALL FLUES UP TO MANUFACTURER'S RECOMMENDED ROOF TERMINATION.
18. SLOPE ALL VENTS / FLUES PER MANUFACTURER'S RECOMMENDATIONS.
19. EXTERIOR EQUIPMENT PADS; WHERE REQUIRED PROVIDE CONCRETE PAD, 6" THICK. TO BE 6" WIDER AND LONGER THAN EQUIPMENT. [redacted] AT BUILDING. COORDINATE WITH ARCHITECTURAL AND CIVIL DRAWINGS.
20. HOUSEKEEPING PADS; WHERE REQUIRED PROVIDE REINFORCED CONCRETE PADS. HOUSEKEEPING PADS SHALL COMPLY WITH APPLICABLE CODES INCLUDING SEISMIC DESIGN REQUIREMENTS.

AFAE NGINEERING, LLC
CONSULTING ENGINEERS
HVAC - PLUMBING - ELECTRICAL
706 WESTLAND DRIVE
LEXINGTON, KENTUCKY 40504
PHONE (859) 255-4437

STATE OF KENTUCKY
THOMAS BRADLEY WILSON JR.
LICENSED PROFESSIONAL ENGINEER

ROWAN COUNTY AMBULANCE GARAGE

MOREHEAD, KENTUCKY

DATE	REVISION	BY

DESIGN DOCUMENTS:
The owner assumes any and all responsibility and liability for problems which arise from failure to follow the plans, specifications and the design intent they convey.

COPYRIGHT ©
This document discloses subject matter considered confidential to [redacted] and on which rights to reproduce the document or any part thereof, or to disclose any information contained therein to others, or to use it for purposes other than those for which it was furnished to [redacted] are reserved.

PROJECT NO.	2306
DESIGNED BY	TBW
DRAWN BY	TBW
CHECKED BY	TBW
REVIEWED BY	
DATE	APRIL 2020
SCALE	AS NOTED

OF
Engineers
Architects
Planners
624 Wellington Way
Lexington, KY 40503
www.[redacted]ex.com
Phone: (859)223-5694
Fax: (859)223-2607

DRAWING NO.

M-1

SHEET OF